


NOTES:

- | | |
|--|---|
| <p>1、POWER: 230V/1500W(+5%/-10%).</p> <p>2、HI-POT ≥1500V/SEC, CUT OFF CURRENT:1mA.</p> <p>3、INSULATION RESITANCE: ≥100MΩ/DC500V, MIN</p> <p>4、PROCESS:AL RADIATING.</p> <p>5、LEAKAGE CURRENT TI BE 1.0mA MAX. WHILE ENERGIZED AT RATED VOLTAGE</p> | <p>6、TUBE:SUS304.</p> <p>7、RESISTANCE WIRE MATERIAL:FE-CR WIRE.</p> <p>8、INSULATED FILLER:MAGNESIUM OXIDE POWDER</p> <p>9、LEAD-OUT ROD MATERIAL:#10 STEEL, PLATED.</p> <p>10、SEALING MATERIAL:SILICON RUBBER.</p> <p>11、<u>DEVELOPED LENGTH:3500mm.</u></p> |
|--|---|

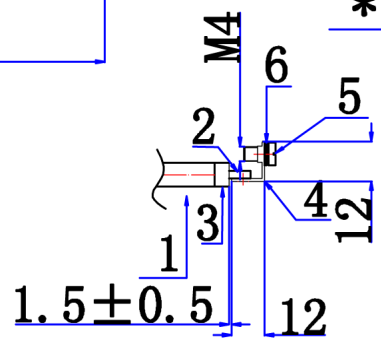

| ITEM | NAME | MATERIAL | RATING | QTY | COM |
|------|---------------|---------------|-------------|-----|-----|
| 6 | Fillet washer | SUS304 | ø7*ø4.2*0.7 | 2 | |
| 5 | Screw | SUS304 | m4*10 | 2 | |
| 4 | Connector | SUS430 | 250#-M4-90° | 2 | |
| 3 | Connector | Ceramic | ø7.8X2.8X5 | 2 | |
| 2 | COIL FIN | #10MILD STEEL | ø2.0±0.1 | 2 | |
| 1 | SEALANT | SUS304 | ø8.0±0.05 | 1 | |

| | | | | |
|---|--|--------------|-----------------|-------------------------|
| MODEL: | | DWG. NO: | CUSTOMER MODEL: | HEATING TUBULAR ELEMENT |
| JLø8.0G3090 | | 20180619-6 | 340C | REV: D |
| UNIT: mm | | SCALE: N.T.S | | |
| FOSHAN TONGBAO HUAYU INDUSTRIAL., LTD. | | | | |