


■ **Specifications**

Current rating:1.0AAC/DC  
Voltage rating:30V AC/DC  
Contact resistance:20m ohm. max.  
Insulation resistance:1000M ohm. Min.  
Withstanding voltage:750V AC for one minute  
Operating temperature range:-40°C to +105°C

■ **Material and Finish**

Insulator:High Temp. Plastic(UL94V-0)  
Contact:Copper Alloy  
Plating:Selective Gold Plated

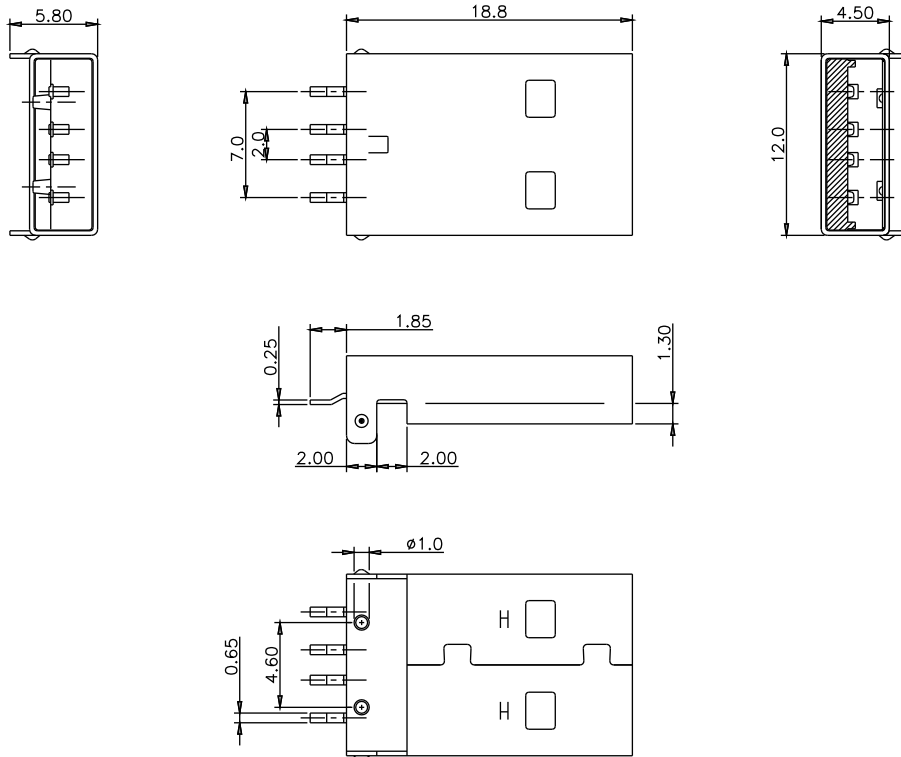

■ **Ordering Information**

**5075ARRP-04-SM1**

①      ②      ③

① A Type Male (Reverse)	② No. Of Contacts	③ SMD Type 1
-------------------------	-------------------	--------------

■ **Recommended PCB Layout**

