


# SoniCrest Microphones

*HMO06B*  
Series




**Dimension**  
Unit : mm  
Tolerance :  $\pm 0.3$ mm

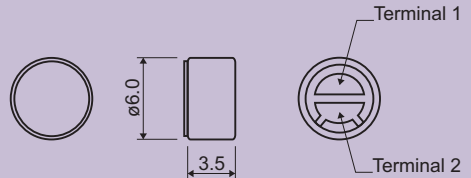

## Frequency Response

Applied Voltage  $V_s = 3V$   
Load Resistance  $R_L = 2.2k\Omega$

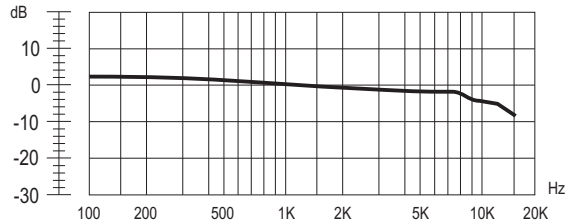

## Specification (all data taken at 25°C unless otherwise specified)

Model	Directivity	★Sensitivity (dB)	Rated Voltage (V)	Maximum Operating Voltage (V)	Current Consumption (mA)	Frequency Range (Hz)	Impedance ( $\Omega$ )	S/N Ratio (dB)
HMO0603B-60	Omnidirectional	-40 $\pm$ 3	3	10	$\leq 0.5$	30 ~ 16000	Low	$\geq 58$

★ Condition : 0dB = 1V/pa, 1kHz, Different sensitivity level is available upon request.