

NT77



18.4 × 15.2 × 10.2

CQC 08001023386

R50126372 cULus E158859

Features

- Super light in weight.
- High sensitivity.
- Switching capacity up to 12A.
- PC board mounting.

Ordering Information

NT77 A S 10 DC12V
 1 2 3 4 5

1 Part number: NT77
 2 Contact arrangement: A:1A
 3 Enclosure: S: Sealed type; NIL: Dust cover
 4 Contact current: 5:5A; 10:10A; 12:12A
 5 Coil rated voltage(V): DC:3,5,6,9,12,18,24

Contact Data

Contact Arrangement	1A (SPSTNO)		
Contact Material	AgCdO AgSnO ₂		
Contact Rating (resistive)	10A/277VAC,30VDC; 12A/125VAC,250VAC,30VDC		
Max. Switching Power	360W 3000VA		
Max. Switching Voltage	30VDC 300VAC	Max. Switching Current:12A	
Contact Resistance or Voltage drop	≤50mΩ	Item 4.12 of IEC 61810-7	
Operational life	Electrical	10 ⁵	Item 4.30 of IEC 61810-7
	Mechanical	10 ⁷	Item 4.31 of IEC 61810-7

CAUTION: 1.For the intermediate current, it only applies to the room temperature.

Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pickup voltage VDC(max) (75%of rated voltage)	Release voltage VDC(min) (5% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
003-450	3	3.3	20	2.25	0.15	0.45	≤8	<5
005-450	5	5.5	56	3.75	0.25			
006-450	6	6.6	80	4.50	0.30			
009-450	9	9.9	180	6.75	0.45			
012-450	12	13.2	320	9.00	0.60			
018-450	18	19.8	720	13.5	0.90			
024-450	24	26.4	1280	18.0	1.20			

CAUTION: 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
 2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

Operation condition


Insulation Resistance	100MΩ min (at 500VDC)	Item 7 of IEC 60255-5
Dielectric Strength	Between contacts	50Hz 1000V
	Between contact and coil	50Hz 2500V
Item 6 of IEC 60255-5		Item 6 of IEC 60255-5
Shock resistance	100m/s ² 11ms	IEC 68-2-27 Test Ea
Vibration resistance	10Hz~55Hz double amplitude 1.5mm	IEC 68-2-6 Test Fc
Terminals strength	5N	IEC 68-2-21 Test Ua1
Solderability	235°C ± 2°C 3s ± 0.5s	IEC 68-2-20 Test Ta method 1
Ambient Temperature	-40°C ~70°C	
Relative Humidity	85% (at 40°C)	IEC 68-2-3 Test Ca
Mass	7g	

Safety approvals

Safety approval	UL&CUR	TUV	CQC
Load	12A/125VAC 10A/277VAC 30VDC	12A/250VAC;30VDC	12A/250VAC


Dimensions

mm /inch

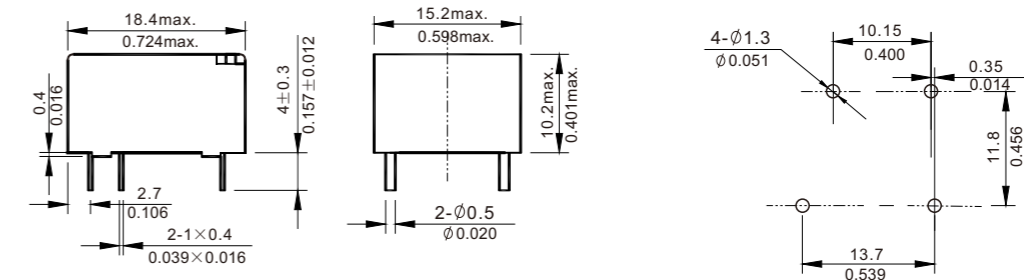

Dimensions

Mounting (Bottom view)



Wiring diagram (Bottom view)

NOTES 1).Dimensions are in millimeters.
 2).Inch equivalents are given for general information only.

Reference Data

