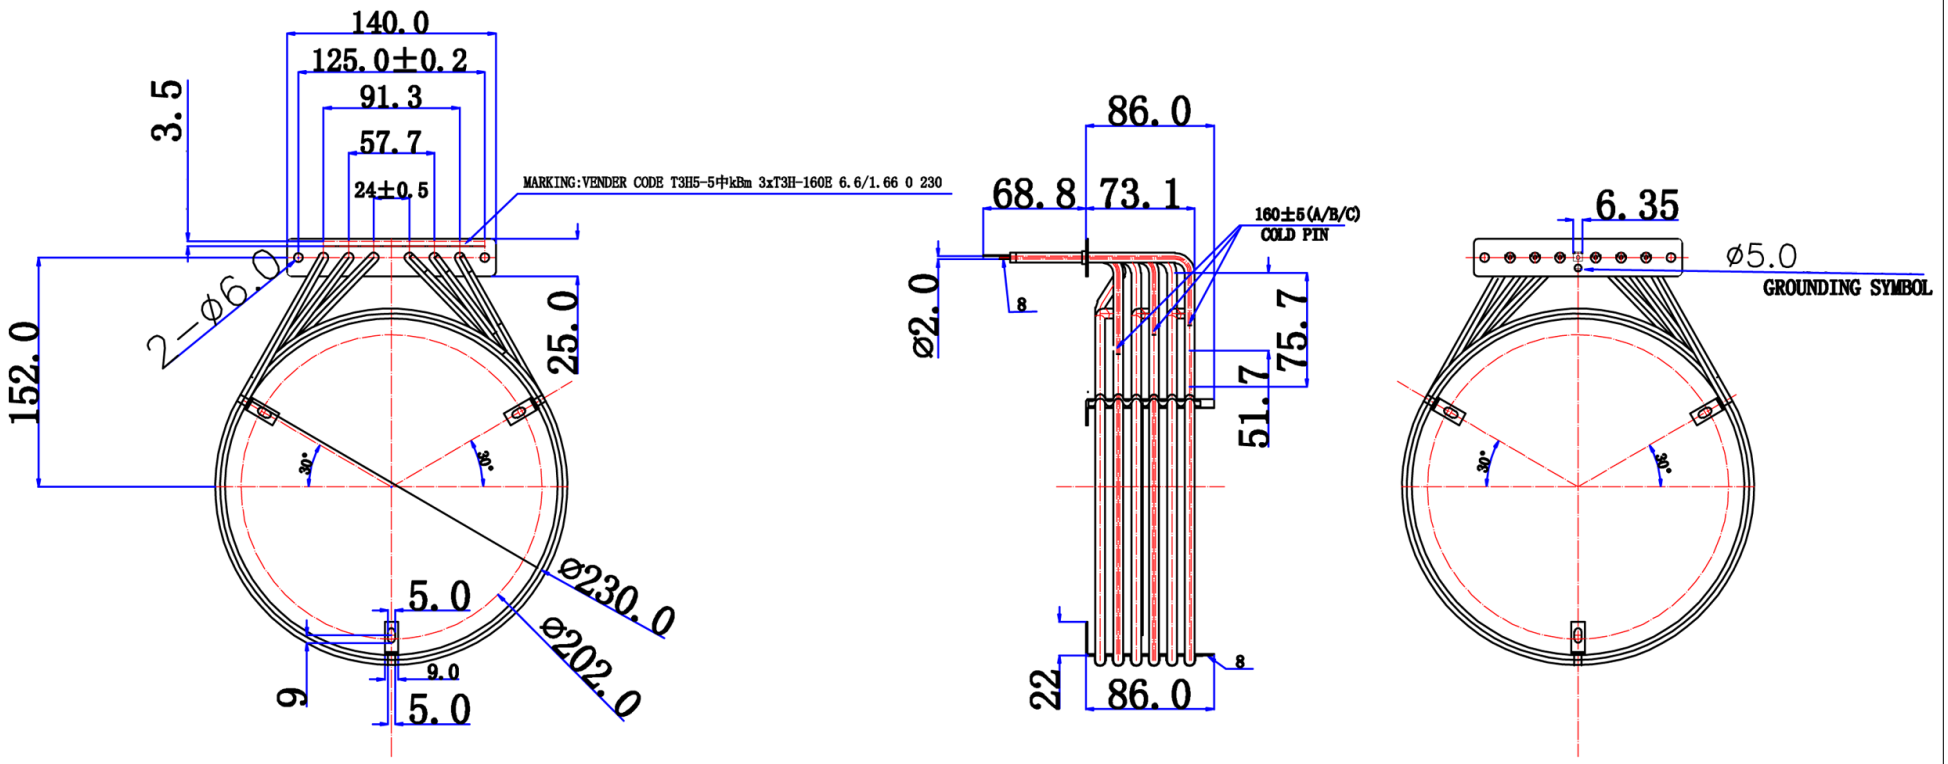

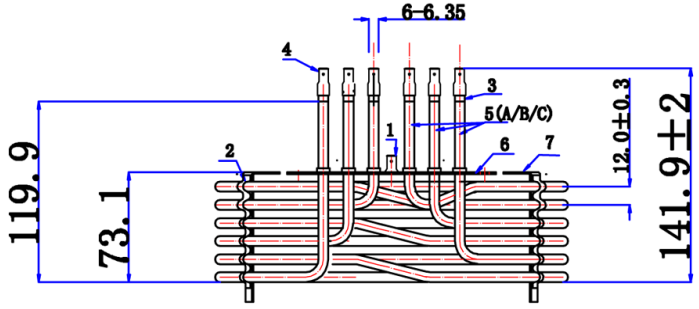

NOTES:

1、 POWER:A、B、C HEATING TUBULAR ELEMENT: 230V/1650W(+5%/-10%).

2、 HI-POT ≥1500V/SEC, CUT OFF CURRENT:1mA.

3、 INSULATION RESITANCE:≥100M Ω/DC500V, MIN

4、 PROCESS:AL RADIATING.

5、 LEAKAGE CURRENT TI BE 1.0mA MAX. WHILE ENERGIZED AT RATED VOLTAGE

6、 TUBE:SUS304. WALL THICKNESS:0.45mm

7、 FLATNESS:3.0mmMAX

8、 ALL DIMENSIONS ARE IN MM.

ITEM	NAME	WATERILAL	RATING	QTY	CODE
8	COLD PIN	MILD STEEL	ø2.0	6	
7	STATOR	SUS430	86*22*9	3	
6	BRACKET	SUS430	140*25	1	
5	TUBE	SUS304	6.6*0.45		
4	Connector	SUS430	250#直片	6	
3	Connector	Ceramic	ø6.3X2.3X4	6	
2	Fixing clip	SUS430	ø6.6x6	3	
1	GROUND TERMINAL	SUS304	250#-90°	1	

			MODEL: JLø6.6G3051	DWG. NO: 20180429-1	CUSTOMER MODEL:
DRAWN		20180428		UNIT: mm	SCALE: N.T.S
CHECKED					REV: A
APPROVED					

TITLE: HEATING TUBULAR ELEMENT

FOSHAN TONGBAO HUAYU INDUSTRIAL., LTD.