


Specifications:
 1. RATING: 250V AC/10A
 2. HI-POTEST: 1800V/0.5mA/S
 3. OPEN ON RISE HIGH TEMP: $70 \pm 5^\circ\text{C}$
 4. TURN ON ANGLE: $170 \pm 20^\circ\text{C}@25^\circ\text{C ROOM}$
 5. ROTATION: $305 \pm 5^\circ$
 6. CUSTOMER MODEL: KST501-N-16126

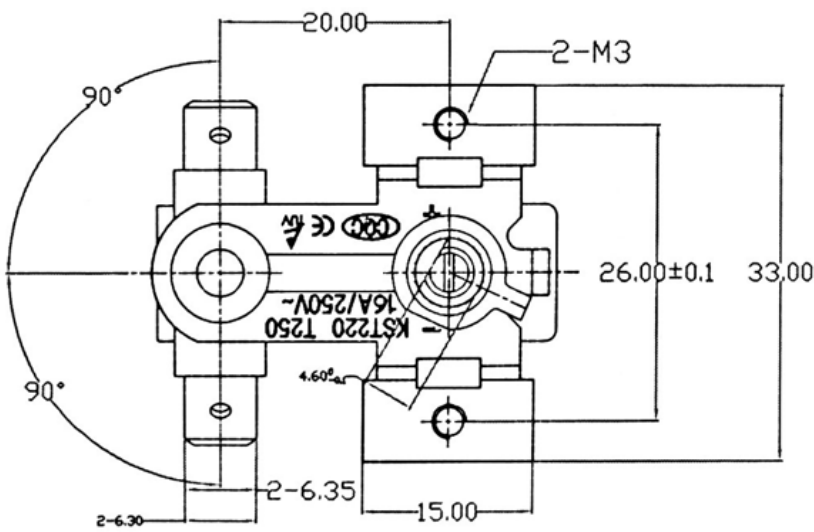

			18. 02. 06				
					S	B	A
							1:1